

LM2925

LM2925 Low Dropout Regulator with Delayed Reset



Literature Number: SNOSBE8

LM2925 Low Dropout Regulator with Delayed Reset

General Description

The LM2925 features a low dropout, high current regulator. Also included on-chip is a reset function with an externally set delay time. Upon power up, or after the detection of any error in the regulated output, the reset pin remains in the active low state for the duration of the delay. Types of errors detected include any that cause the output to become unregulated: low input voltage, thermal shutdown, short circuit, input transients, etc. No external pull-up resistor is necessary. The current charging the delay capacitor is very low, allowing long delay times.


Designed primarily for automotive applications, the LM2925 and all regulated circuitry are protected from reverse battery installations or two-battery jumps. During line transients, such as a load dump (60V) when the input voltage to the regulator can momentarily exceed the specified maximum operating voltage, the 0.75A regulator will automatically shut down to protect both internal circuits and the load. The

LM2925 cannot be harmed by temporary mirror-image insertion. Familiar regulator features such as short circuit and thermal overload protection are also provided.

Features

- 5V, 750 mA output
- Externally set delay for reset
- Input-output differential less than 0.6V at 0.5A
- Reverse battery protection
- 60V load dump protection
- -50V reverse transient protection
- Short circuit protection
- Internal thermal overload protection
- Available in plastic TO-220
- Long delay times available
- P+ Product Enhancement tested

Typical Application Circuit

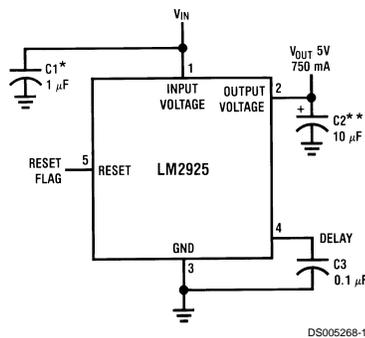


DS005268-1

*Required if regulator is located far from power supply filter.
 ** C_{OUT} must be at least 10 μF to maintain stability. May be increased without bound to maintain regulation during transients. Locate as close as possible to the regulator. This capacitor must be rated over the same operating temperature range as the regulator. The equivalent series resistance (ESR) of this capacitor is critical; see curve.

FIGURE 1. Test and Application Circuit

Connection Diagram

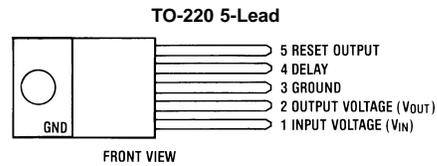

DS005268-2

Order Number LM2925T
 See NS Package Number T05A

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|----------------------|-----|
| Input Voltage | |
| Operating Range | 26V |
| Overshoot Protection | 60V |

Internal Power Dissipation (Note 2)

| | |
|---|--|
| Operating Temperature Range | Internally Limited -40°C to + 125°C |
| Maximum Junction Temperature | 150°C |
| Storage Temperature Range | -65°C to + 150°C |
| Lead Temperature (Soldering, 10 seconds) | 260°C |
| ESD rating is to be determined | |

V_{OUT}
Electrical Characteristics

V_{IN} = 14V, C₂ = 10 μf, I_O = 500 mA, T_J = 25°C (Note 4) (unless otherwise specified)

| Parameter | Conditions | Min | Typ | Max | Units |
|---|--|----------|---------------|----------|-------------------|
| | | (Note 3) | | | |
| Output Voltage | 6V ≤ V _{IN} ≤ 26V, I _O ≤ 500 mA, -40°C ≤ T _J ≤ +125°C | 4.75 | 5.00 | 5.25 | V |
| Line Regulation | 9V ≤ V _{IN} ≤ 16V, I _O = 5 mA 6V ≤ V _{IN} ≤ 26V, I _O = 5 mA | | 4 10 | 25 50 | mV mV |
| Load Regulation | 5 mA ≤ I _O ≤ 500 mA | | 10 | 50 | mV |
| Output Impedance | 500 mA _{DC} and 10 mA _{RMS} , 100 Hz-10 kHz | | 200 | | mΩ |
| Quiescent Current | I _O ≤ 10 mA I _O = 500 mA I _O = 750 mA | | 3 40 90 | 100 | mA mA mA |
| Output Noise Voltage | 10 Hz-100 kHz | | 100 | | μV _{rms} |
| Long Term Stability | | | 20 | | mV/1000 hr |
| Ripple Rejection | f _o = 120 Hz | | 66 | | dB |
| Dropout Voltage | I _O = 500 mA I _O = 750 mA | | 0.45 0.82 | 0.6 | V V |
| Current Limit | | 0.75 | 1.2 | | A |
| Maximum Operational Input Voltage | | 26 | 31 | | V |
| Maximum Line Transient | V _O ≤ 5.5V | 60 | 70 | | V |
| Reverse Polarity Input Voltage, DC | V _O ≥ -0.6V, 10Ω Load | -15 | -30 | | V |
| Reverse Polarity Input Voltage, Transient | 1% Duty Cycle, τ ≤ 100 ms, 10Ω Load | -50 | -80 | | V |

Reset Output
Electrical Characteristics

V_{IN} = 14V, C₃ = 0.1 μF, T_A = 25°C (Note 4) (unless otherwise specified)

| Parameter | Conditions | Min | Typ | Max | Units |
|---------------------------------|---|----------|-----|-----|-------|
| | | (Note 3) | | | |
| Reset Voltage | | | | | |
| Output Low | I _{SINK} = 1.6 mA, V _{IN} = 35V | | 0.3 | 0.6 | V |
| Output High | I _{SOURCE} = 0 | 4.5 | 5.0 | 5.5 | V |
| Reset Internal Pull-up Resistor | | | 30 | | kΩ |
| Reset Output Current Limit | V _{RESET} = 1.2 V | | 5 | | mA |
| V _{OUT} Threshold | | | 4.5 | | V |
| Delay Time | C ₃ = .005 μF | | 12 | | ms |
| | C ₃ = 0.1 μF | 150 | 250 | 300 | ms |
| | C ₃ = 4.7 μF tantalum | | 12 | | s |

Reset Output Electrical Characteristics (Continued)

$V_{IN} = 14V$, $C3 = 0.1 \mu F$, $T_A = 25^\circ C$ (Note 4) (unless otherwise specified)

| Parameter | Conditions | Min | Typ | Max | Units |
|---------------|------------|----------|------|-----|---------|
| | | (Note 3) | | | |
| Delay Current | Pin 4 | 1.2 | 1.95 | 2.5 | μA |


Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical specifications do not apply when operating the device beyond its rated operating Conditions.

Note 2: Thermal resistance without a heat sink for junction to case temperature is $3^\circ C/W$ (TO-220). Thermal resistance for TO-220 case to ambient temperature is $50^\circ C/W$.

Note 3: These parameters are guaranteed and 100% production tested.

Note 4: To ensure constant junction temperature, low duty cycle pulse testing is used.

Typical Circuit Waveforms

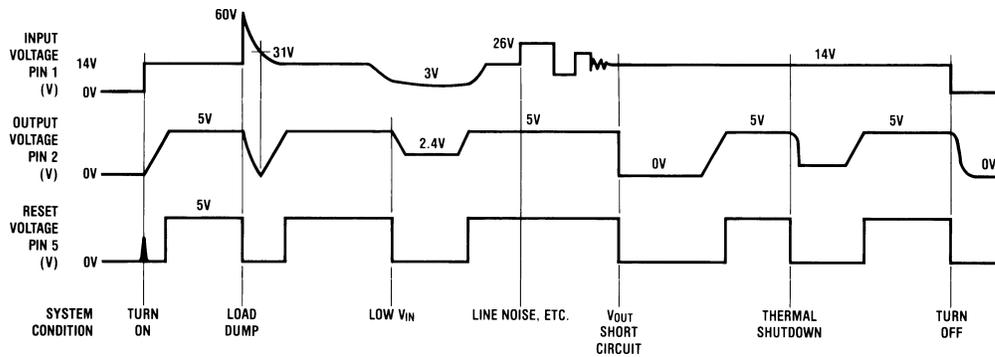


DS005268-3

FIGURE 2.


Typical Performance Characteristics

Reset Voltage




DS005268-4

Reset Voltage



DS005268-5


Delay Time




DS005268-6

Typical Performance Characteristics (Continued)


Reset Voltage on Power-up




Delay Time




Reset Pull-up Resistor R10




Dropout Voltage




Line Transient Response




Ripple Rejection




Ripple Rejection



Quiescent Current




Output Voltage




Typical Performance Characteristics (Continued)


Quiescent Current




Quiescent Current




Load Transient Response




Peak Output Current



Maximum Power Dissipation (TO-220)



Output Capacitor ESR



Definition of Terms

Dropout Voltage: The input-output voltage differential at which the circuit ceases to regulate against further reduction in input voltage. Measured when the output voltage has dropped 100 mV from the nominal value obtained at 14V input, dropout voltage is dependent upon load current and junction temperature.

Input Voltage: The DC voltage applied to the input terminals with respect to ground.

Input-Output Differential: The voltage difference between the unregulated input voltage and the regulated output voltage for which the regulator will operate.

Line Regulation: The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

Load Regulation: The change in output voltage for a change in load current at constant chip temperature.

Long Term Stability: Output voltage stability under accelerated life-test conditions after 1000 hours with maximum rated voltage and junction temperature.

Output Noise Voltage: The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

Quiescent Current: The part of the positive input current that does not contribute to the positive load current. The regulator ground lead current.

Ripple Rejection: The ratio of the peak-to-peak input ripple voltage to the peak-to-peak output ripple voltage.

Temperature Stability of V_O : The percentage change in output voltage for a thermal variation from room temperature to either temperature extreme.

Application Hints

EXTERNAL CAPACITORS

The LM2925 output capacitor is required for stability. Without it, the regulator output will oscillate, sometimes by many volts. Though the 10μ F shown is the minimum recommended value, actual size and type may vary depending upon the application load and temperature range. Capacitor effective series resistance (ESR) also effects the IC stability. Since ESR varies from one brand to the next, some bench work may be required to determine the minimum capacitor value to use in production. Worst-case is usually determined at the minimum junction and ambient temperature and maximum load expected.

Output capacitors can be increased in size to any desired value above the minimum. One possible purpose of this would be to maintain the output voltages during brief conditions of negative input transients that might be characteristic of a particular system.

Application Hints (Continued)

Capacitors must also be rated at all ambient temperatures expected in the system. Many aluminum type electrolytics will freeze at temperatures less than -30°C , reducing their effective capacitance to zero. To maintain regulator stability down to -40°C , capacitors rated at that temperature (such as tantalums) must be used.

RESET OUTPUT

The range of values for the delay capacitor is limited only by stray capacitances on the lower extreme and capacitance leakage on the other. Thus, delay times from microseconds to seconds are possible. The low charging current, typically 2.0 microamps, allows the use of small, inexpensive disc capacitors for the nominal range of 100 to 500 milliseconds. This is the time required in many microprocessor systems for the clock oscillator to stabilize when initially powered up. The RESET output of the regulator will thus prevent erroneous data and/or timing functions to occur during this part of operation. The same delay is incorporated after any other fault condition in the regulator output is corrected.

Circuit Schematic


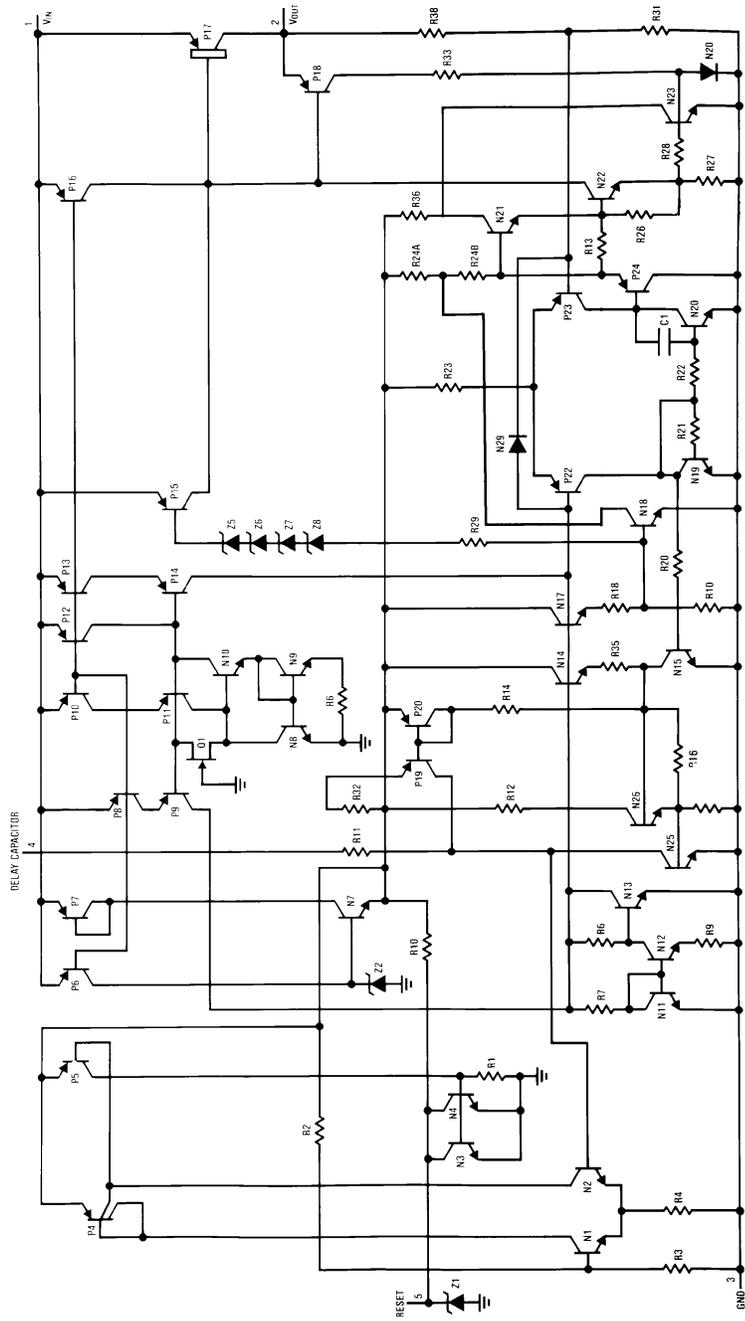


FIGURE 3.

Physical Dimensions inches (millimeters) unless otherwise noted

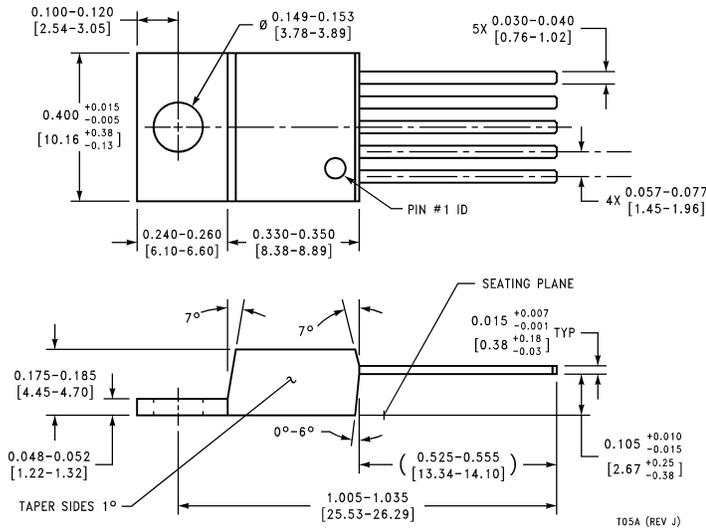

5-Lead TO-220 Power Package (T)
Order Number LM2925T
NS Package Number T05A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 Americas
 Tel: 1-800-272-9959
 Fax: 1-800-737-7018
 Email: support@nsc.com

National Semiconductor Europe
 Fax: +49 (0) 1 80-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 1 80-530 85 85
 English Tel: +49 (0) 1 80-532 78 32
 Français Tel: +49 (0) 1 80-532 93 58
 Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group
 Tel: 65-2544466
 Fax: 65-2504466
 Email: sea.support@nsc.com

National Semiconductor Japan Ltd.
 Tel: 81-3-5620-6175
 Fax: 81-3-5620-6179

www.national.com

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Mobile Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Transportation and Automotive | www.ti.com/automotive |
| Video and Imaging | www.ti.com/video |

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated